

T2-C Specifications

Operation	
Print Resolution	1600 x 1600 dpi or 1600 x 800 dpi
Print Speed	6 ips (152 mm/sec) or 12 ips (300 mm/sec)
Print Area	Width: 8.8" (223 mm) Length without stitching: 0.6" – 30" (15 mm – 762 mm) Length with stitching: Unlimited
Media Sensors	Adjustable Optical Tracking Edge Sensor supporting Gap, Reflective mark and Continuous media
Connectivity	Ethernet 10/100/1000
Driver	Microsoft® Windows 10, 8, 7, Windows Server® 2012, 2008, 64/32-bit drivers
Software	TrojanControl Software, Microsoft Windows® 10, 8, 7; Windows Server® 2012, 2008, 64/32-bit Drivers
RIP Software	Trojan RIP or Masatch SoftRIP software option available
Slitting Station	(3) slitter blades included by default, up to (7) slitter blades may be installed and used. Slitting not allowed for continuous material. Cardboard cores with measuring (label width + edge trim) should be ordered.
Environment & Physical	
Operation	Between 68° F – 86° F (between 20° C – 30° C) at RH 22 to 80% (non-condensing)
Storage	Between 41° F – 122° F (5° C – 50° C) at RH up to 85%, non-condensing at 149° F (65° C)
Power Requirements	100-240V AC 50-60 Hz, 2.5A
Dimensions	With 2 Liter external ink tanks: 23.8" L x 22.8" W x 31.3" H (606 mm x 580 mm x 795 mm)
Touchscreen	7" (177.8 mm) Touchscreen Display
Weight	132.3 lbs. (60 kg) without supplies

The Labels You Want When You Need Them.®

+49 (0) 6074 31025-00 | infoDE@astronovaproductid.com | astronovaproductid.com

©2023 TrojanLabel, an AstroNova Division, and AstroNova, Inc. All rights reserved. All specifications subject to change at any time without notice. Please consult your sales representative for most current information.




T2-C



The TrojanLabel® T2-C is a one-of-a-kind tabletop label printing press that incorporates the features and functionality of a traditional large production press into a footprint small enough to fit into any size print department. The T2-C is designed for consistent, high-volume 24/7 production. Accurate image placement, tension control, superior print resolution, built-in-slitters, and reduced total cost of ownership, are just some of the key features that make the T2-C so unique.

A perfect combination of ease-of-use, precision, and quality make the T2-C an ideal label printing solution designed to give both owners and users peace of mind.

Powered by
memjet.



BUILT ON ABILITY

Flexibility, Durability, Reliability

Introducing the T2-C, a one-of-a-kind 24/7 tabletop label production press



Ink Savings

Large 2-liter ink tanks are economical and long-lasting.



Flexible Packaging
Food-safe low migration inks for use on flexible packaging material with a variety of barrier options.

Consistent Print Quality

Servo driven dynamic web tension control for perfect image placement and edge to edge printing. Superior mid-job maintenance routines and aerosol extraction system makes longer print cycles operator friendly.



In-line Slitters

Increased throughput with built-in slitter feature allows to slit multiple across label constructions to individual finished rolls while you print. Produce up to 8 separate printed output rolls from a single input roll.




In-Line Production

Optional output nip accessory enables inline integration to third-party devices such as converting or packaging equipment. Built-in I/O controls to start, stop or pause the printer for synchronization with downstream processes.



TrojanControl Software

Full local control plus built-in cost calculator for easy job pricing and analysis.

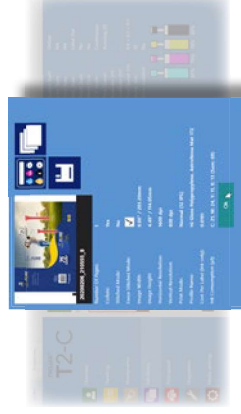


Remote Diagnostics

Built-in capability allows a tech support professional to access your printer remotely for online remote diagnostics to minimize downtime and continue production.



User-Friendly

Intuitive interface and built-in job library allow for easy operation. Statistics show complete history of print jobs along with job cost information.

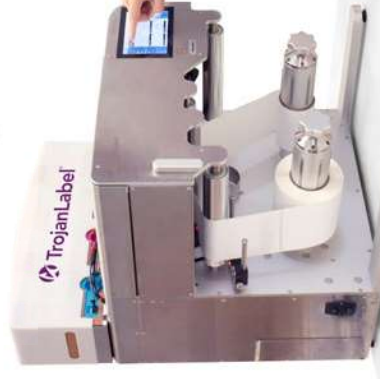

Pre-Die Cut Labels

TrojanControl precision makes it effortless to print on pre-die cut labels in perfect registration.

